

500 Series

500 Series Overview



Specifications	WFH500	WFH525	WFH525/ACV	525EHA
Flow Rate	120 GPH (454 GPH)	120 GPH (454 GPH)	120 GPH (454 GPH)	120 GPH (454 GPH)
Fuel Port Size	1/2 NPT	1/2 NPT	1/2 NPT	1/2 NPT
Coolant Port Size	N/A	1/2 NPT	1/2 NPT	1/2 NPT
Width	5.3 in. (13.5 cm)	5.3 in. (13.5 cm)	5.3 in. (13.5 cm)	5.3 in. (13.5 cm)
Depth	5.3 in. (13.5 cm)	5.3 in. (13.5 cm)	5.3 in. (13.5 cm)	5.3 in. (13.5 cm)
Height	15.8 in. (40.1 cm)	15.8 in. (40.1 cm)	15.9 in. (40.3 cm)	15.9 in. (40.3 cm)
H ₂ O Removal	99%	99%	99%	99%
Coolant Ports	No	Yes	Yes	Yes
Heater Ports				
12 vdc Pre-heater	Yes	No	No	No
120 vdc Pre-heater	No	No	No	Yes
Automatic Coolant Valve (ACV)	No	No	Yes	Yes
Service Element	4 in.	4 in.	4 in.	4 in.
Operating Temperature	-40° to +255°F (-40° to +124°C)			

PROSEP FILTER SYSTEMS LTD
Unit G19
River Bank Way
Lowfields Business Park
Elland
West Yorkshire
HX5 9DN


Tel: 01422 377367

Fax: 01422 377369

Email: enquiries@prosep.co.uk

www.prosep.co.uk

Map and Directions to Prosep Filters Limited

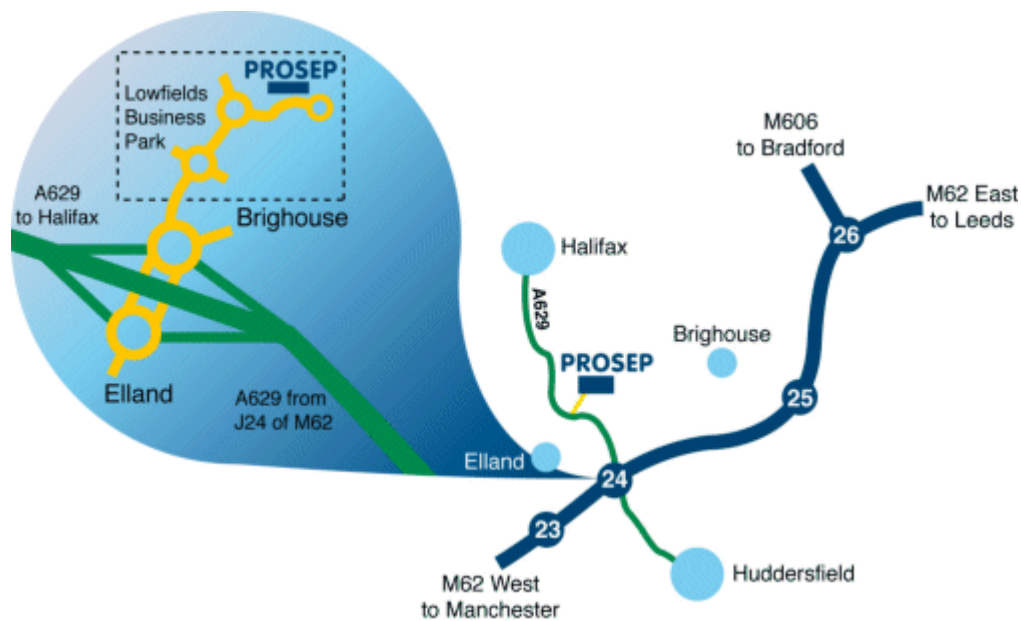

Leave M62 at Junction 24.

At roundabout adjacent to Cedar Court Hotel take 2nd exit onto dual carriageway (A629), signposted Halifax.

Take 1st exit slip road.

At roundabout at end of sliproad, take 3rd exit off.

This is the entrance to Lowfields Business Park.

Proceed straight over 1st roundabout.

At next roundabout take 2nd exit onto River Bank Way - Prosep Filters can be found on the left after the S-bend.

[Link to Google Maps](#)