

700 Series

700 Series Overview



	745R30	760R30	790R30	790R3024	7125R30	7125R3024
Power	12 volt	12 volt	12 volt	24 volt	12 volt	24 volt
Max Flow Rate	45 GPH (170 LPH)	60 GPH (227 LPH)	90 GPH (341 LPH)	90 GPH (341 LPH)	120 GPH (454 LPH)	120 GPH (454 LPH)
Port Size (SAE J1926)	7/8"-14 UNF	7/8"-14 UNF	7/8"-14 UNF	7/8"-14 UNF	7/8"-14 UNF	7/8"-14 UNF
Height	10.8 in. (25.7 cm)	11.8 in. (28.4 cm)	12.8 in. (31.2 cm)	12.8 in. (31.2 cm)	15.2 in. (38.5 cm)	15.2 in. (38.5 cm)
Width	4.3 in. (11.0 cm)	4.3 in. (11.0 cm)	4.3 in. (11.0 cm)	4.3 in. (11.0 cm)	4.3 in. (11.0 cm)	4.3 in. (11.0 cm)
Depth	6.5 in. (16.5 cm)	6.5 in. (16.5 cm)	6.5 in. (16.5 cm)	7.1 in. (18.0 cm)	6.5 in. (16.5 cm)	7.1 in. (18.0 cm)
Weight (dry)	4.5 lb (2.0 kg)	5.5 lb (2.5 kg)	6.5 lb (3.0 kg)	6.5 lb (3.0 kg)	6.7 lb (3.03 kg)	6.7 lb (3.03 kg)
Clean Pressure Drop	0.7 PSI (4.8 kPa)	0.7 PSI (4.8 kPa)	0.7 PSI (4.8 kPa)	0.7 PSI (4.8 kPa)	0.7 PSI (4.8 kPa)	0.7 PSI (4.8 kPa)
Ambient Temp. Range	-40° to +250°F (-40° to +121°C)					
Max. Fuel Temp.	190°F (32°C)					

Note: All Racor filter materials and seals are compatible with ultra-low sulphur diesel (ULSD) fuel and B2 to B20 Biodiesel.

PROSEP FILTER SYSTEMS LTD
Unit G19
River Bank Way
Lowfields Business Park
Elland
West Yorkshire
HX5 9DN


Tel: 01422 377367

Fax: 01422 377369

Email: enquiries@prosep.co.uk

www.prosep.co.uk

Map and Directions to Prosep Filters Limited

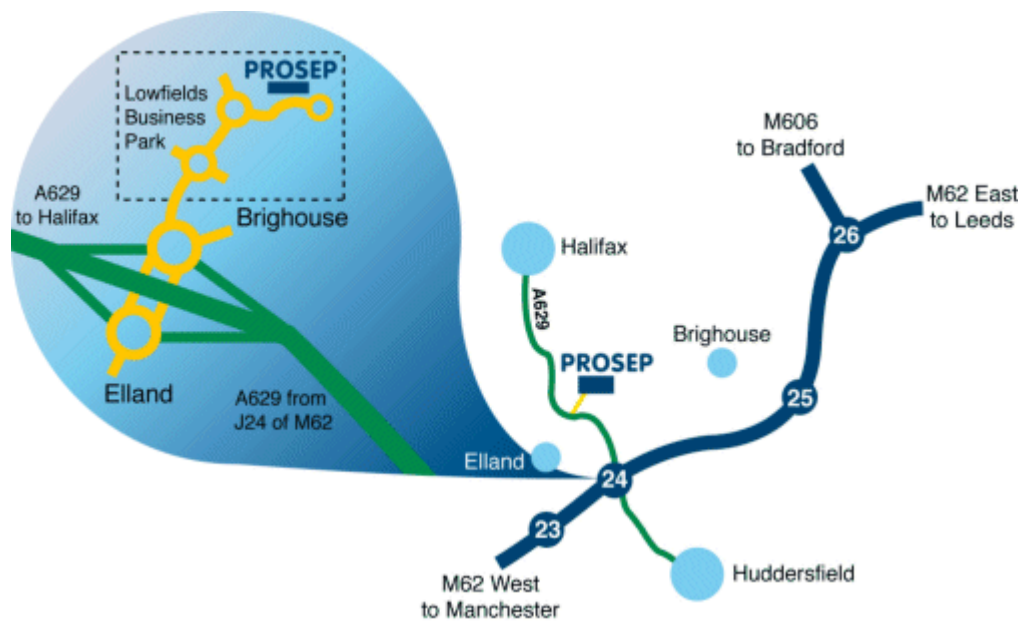

Leave M62 at Junction 24.

At roundabout adjacent to Cedar Court Hotel take 2nd exit onto dual carriageway (A629), signposted Halifax.

Take 1st exit slip road.

At roundabout at end of sliproad, take 3rd exit off.

This is the entrance to Lowfields Business Park.

Proceed straight over 1st roundabout.

At next roundabout take 2nd exit onto River Bank Way - Prosep Filters can be found on the left after the S-bend.

[Link to Google Maps](#)