


Nitrogen generator

# NitroSource® HiFluxx



NitroSource unit

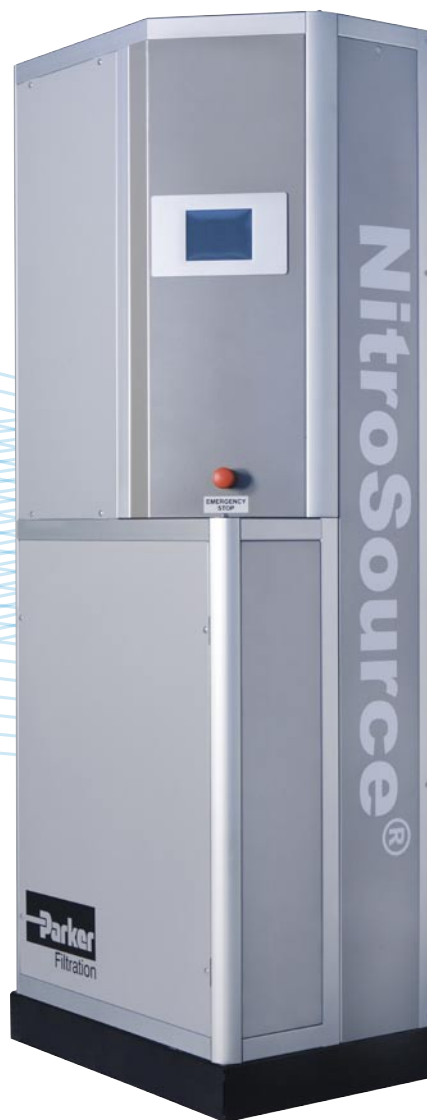

ENGINEERING YOUR SUCCESS.

# NitroSource®

## Capacity up to 5000 Nm<sup>3</sup>/hr

### Features

- Produces nitrogen from compressed air
- Can operate with existing central compressed air system
- Nitrogen purity up to 99.5%
- Capacity up to 5000 Nm<sup>3</sup>/hr
- Compressed air pre-treatment section included
- Minimum maintenance
- Digital data management
- Easy to expand
- Modular design

### Product description

Parker nitrogen generators are based on Parker hollow fibre membrane technology, which makes it possible to separate air into nitrogen and an oxygen-enriched air stream. The NitroSource industrial nitrogen generator easily enables you to produce nitrogen from compressed air.

The NitroSource consists of a main-unit that can be expanded with a maximum of 5 additional subunits. Thanks to the master/slave feature, up to 11 main-units

and their sub-units can be connected and controlled as one generator. The NitroSource includes a high quality compressed air filtration stage.

This optimises the inlet compressed air quality, ensuring long membrane life. The generator is equipped with a digital data management system to monitor, store and communicate parameters such as pressure, flow and residual oxygen concentration.

The installation has virtually no moving parts, resulting in reliable,

trouble free operation with almost no maintenance. The generator is ready to operate as soon as the compressed air supply is connected.

The NitroSource offers an unlimited supply of nitrogen and can be connected to an external storage vessel. This will ensure that the system is able to cope with peak demand in applications where the nitrogen demand is variable.

### Main-unit

- Robust industrial design
- Compact and modern
- High quality pre-filtration stage

### Sub-unit

- Nitrogen modules
- Individual filtration
- Easy to add to existing NitroSource

### Master/slave option

- 11 main-units each with up to 5 sub-units can function as one generator
- Back-up option
- Multiple main-units equally used
- Data management and control via master unit

### Digital data management

- Data logging
- Status information
- System set-up information
- Maintenance indication
- Extensive data exchange facilities
- Detailed alarm functions
- Remote control option

### Global design

- Multi-language operation
- Universal power supply
- Choice of measurement units

### Easily expandable

- Modular construction
- Easy to connect
- Up to 5 sub-units per main-unit

### Easy start-up

- Connect air supply
- Connect power
- Vent permeate
- Easy set-up wizard

### Maintenance

- Easy access
- Only occasional filter exchange required
- Fork-lift truck access points

## Specifications

Minimum nitrogen production capacity

Capacity [Nm<sup>3</sup>/hr] at nominal conditions: ambient temperature 20°C, ambient pressure 1013 mbar(a).

Inlet pressure 7 bar(g)

Nitrogen purity %	99.5	99	98	97	96	95
<b>Capacity per unit in Nm<sup>3</sup>/hr</b>	<b>6.0</b>	<b>9.4</b>	<b>16.2</b>	<b>22</b>	<b>28</b>	<b>34</b>
Main-unit	6.0	9.4	16.2	22	28	34
Main-unit + 1 sub-unit	12.0	18.8	32.4	44	56	68
Main-unit + 2 sub-units	18.0	28.2	48.6	66	84	102
Main-unit + 3 sub-units	24.0	37.6	64.8	88	112	136
Main-unit + 4 sub-units	30.0	47.0	81.0	110	140	170
Main-unit + 5 sub-units	36.0	56.4	97.2	132	168	204

For calculation of the capacity at feed pressures other than the nominal feed pressure: multiply the nominal capacity by the correction factor for the pressure at the inlet of the NitroSource.

Pressure bar(g)	4	5	6	7	8	9	10	11	12	13
Correction factor	0.35	0.51	0.76	1.00	1.20	1.40	1.60	1.90	2.10	2.40

## Technical data

Data/NitroSource Unit	NitroSource Main-unit	NitroSource Sub-unit
Max. delivery pressure	Inlet pressure minus pressure drop (2 bar max.)	
Max. feed pressure	13 bar(g)	
Temperature	10-40°C	
Residual oil content	< 3.0 mg/m <sup>3</sup>	
Pressure dew point	< 5°C	
Noise level	< 45 dB(A)	
Connections	Air inlet: G 1" - Outlet G 1" - Permeate vent: 110 mm	Nitrogen outlet: G 1" - Permeate vent: 110 mm
Electrical data	90-250 VAC/50-60 Hz	
Output signals	0 - 10 volt: oxygen, inlet pressure, flow rate (optional) RS232: datalogging Potential free relay: compressor start/stop, alarm, drain	
Input	Digital input: switch on/off	
Dimensions (HxWxD)	1928 x 725 x 490 mm	1928 x 725 x 270 mm
Weight	180 kg	95 kg

	NitroSource Main-unit	NitroSource Sub-unit
Part numbers	159.003552	159.003553
Maintenance kits - yearly	159.003569	159.003570
Oxygen transmitter	159.002284 - replace once every 3 years	

Reference condition for Nm<sup>3</sup> = 20°C and 1013 mbar(a)

PROSEP FILTER SYSTEMS LTD  
Unit G19  
River Bank Way  
Lowfields Business Park  
Elland  
West Yorkshire  
HX5 9DN


**Tel: 01422 377367**

**Fax: 01422 377369**

Email: [enquiries@prosep.co.uk](mailto:enquiries@prosep.co.uk)

[www.prosep.co.uk](http://www.prosep.co.uk)

**Map and Directions to Prosep Filters Limited**

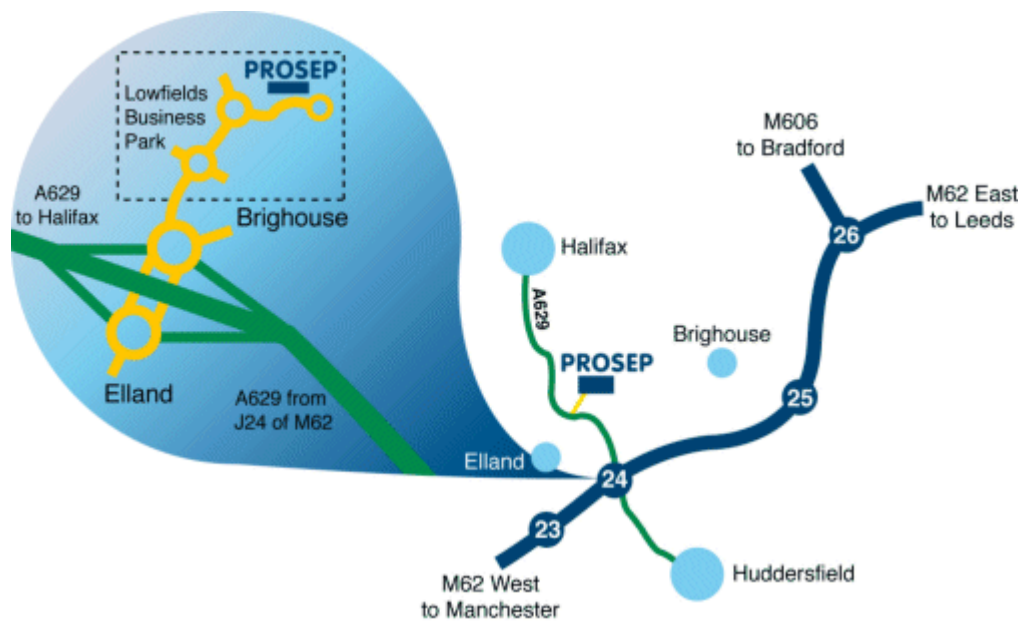

Leave M62 at Junction 24.

At roundabout adjacent to Cedar Court Hotel take 2nd exit onto dual carriageway (A629), signposted Halifax.

Take 1st exit slip road.

At roundabout at end of sliproad, take 3rd exit off.

This is the entrance to Lowfields Business Park.

Proceed straight over 1st roundabout.

At next roundabout take 2nd exit onto River Bank Way - Prosep Filters can be found on the left after the S-bend.

[Link to Google Maps](#)