

Pump protection



The pump protection (Y-Type) strainer is designed specifically to remove potentially damaging debris before it passes through the pump. However, it is now widely used as a strainer for coarse particles entering product lines.

The pump protection strainer is designed to fit into small, confined spaces, as well as for ease of cleaning and the changing of the element.

- Manufactured entirely from 316L Stainless Steel.
- 1" OD - 6" OD line size available.
- Standard finish: 240 grit O.D, Mill finish I.D - Other finishes available on request.
- For 1", 1.5" & 2.5" line sizes, a concentric reducing cone will be used on a standard body.
- Alternative ends can be welded to customers requirements - RJT/IDF/FERRULE/IDF/SMS.
- Shut off valves can be welded to the unit.
-


A pump protection assembly consists of: 1 x Element, 1 x Body, 1 x Single Hinged Clamp & 1 x Lipped EPDM joint ring.

- Elements - Perforated type & wedge wire type available to choose from - *See element pages*
- We recommend ordering a replacement element to ease cleaning and to minimize line down time.
- Jacketed & Duplex strainers can also be supplied to the customers specifications.

Prosep Filter Systems Ltd
Unit G19, River Bank Way,
Lowfields Business Park, Elland,
West Yorkshire HX5 9DN

Phone: 01422 377367
Fax: 01422 377369
email: sales@prosep.co.uk
www.prosep.co.uk

for all your filter requirements

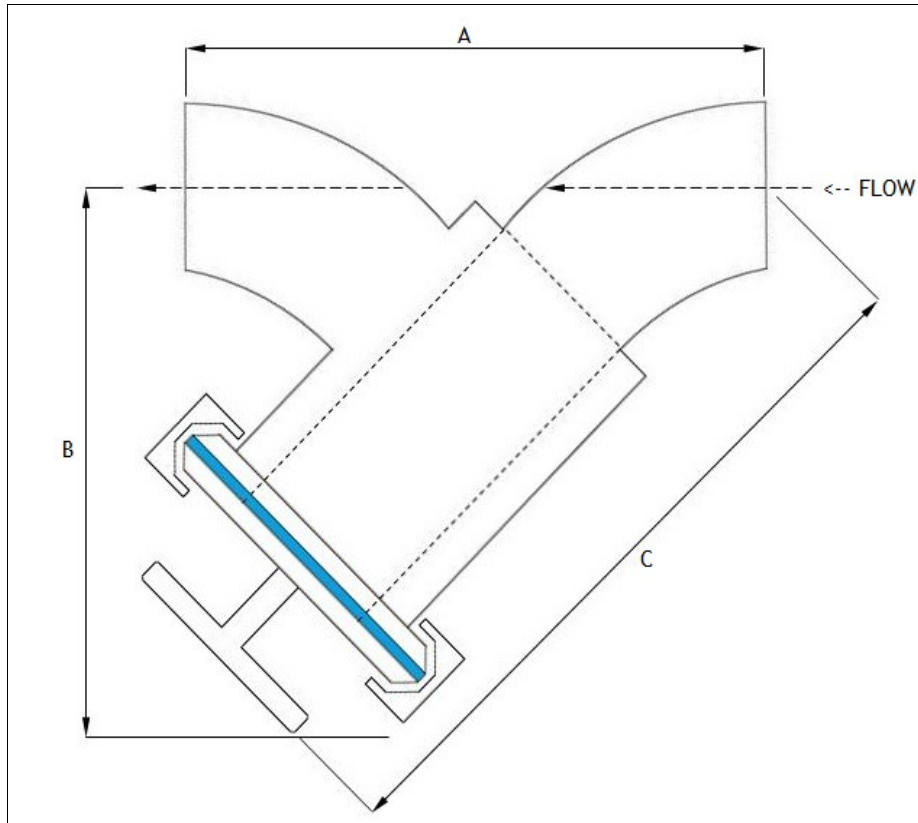

SIZE	1"	1.5"	2"	2.5"	3"	4"	6"
A	307.0	277.0	201.0	370.0	290.0	540.0	473.0
B	200.0	200.0	200.0	250.0	250.0	360.0	400.0
C	263.0	263.0	263.0	367.0	367.0	510.0	550.0