



SPUNFLOW QE Filters

- liquid filters
- polypropylene

SPUNFLOW QE are the economical choice for applications where high removal efficiency and low filtration costs are important. Graded density, high porosity, SPUNFLOW QE filter elements are manufactured from thermally bonded polypropylene microfibres. Offering high throughputs, low pressure loss, high dirt holding capacity and long onstream life, the bonded fibre construction minimises any possibility of fibre migration and is rugged enough to resist particle shedding, even under pulse conditions.


SPUNFLOW QE filters have excellent chemical resistance and contain no surfactants, resins, binders nor adhesives. The fibre matrix has been engineered to provide structural integrity throughout the long service life of the cartridge and finish free construction provides optimum fluid purity and eliminates foaming.

Features and Benefits

- Thermally bonded polypropylene
- 3 to 75 microns
- High dirt holding capacity
- High throughputs
- Low pressure loss
- 99% efficiency



Performance Characteristics

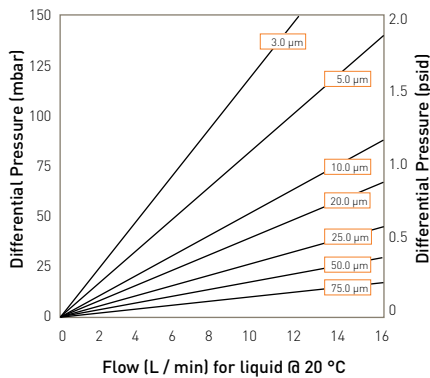

10" Size (250 mm) Cartridge

Specifications

Materials of Construction

- Filtration Media: Polypropylene
- End Caps: Polypropylene

Dimensions

Standard Cartridge
 Outside diameter: 62mm (2.44") x
 Inside diameter: 29mm (1.14")

Recommended Operating Conditions

Maximum Temperature:
 Polypropylene - 65°C (149°F)

Endcapped Cartridge
 Outside diameter: 64mm (2.51") x
 Inside diameter: 27mm (1.06")

Maximum Differential Pressure
 4 bar (58 psid) at 20°C (68°F)

Maximum Recommended Differential
 Pressure
 2 bar (29 psid)

Cleaning and Sterilization

Elements can be autoclaved at 121°C (250°F)
 for 30 minutes and are compatible with a
 wide range of chemicals.

Ordering Information

QE

Code Length (Nominal)	Code Material	Code Micron	Code End Fitting	Code Seal Material	Minimum Box Quantity
09 9.75" (247 mm)	P Polypropylene	03 3 µm 05 5 µm 10 10 µm 25 25 µm 50 50 µm 75 75 µm	0 DOE 2 Flat / 226 3 Flat / 222 6 Flat / 118 / 020 7 Fin / 226 8 Fin / 222 9 213 X Plain E Ext Core	X None E EPDM N Nitrile P* PE S Silicone V Viton** *Plain End or DOE only	10" 40 20" 20 30" 20 40" 20
10 9.875" (251 mm)					
11 10" (254 mm)					
19 19.50" (500 mm)					
20 20" (508 mm)					
29 29.50" (750 mm)					
30 30" (762 mm)					
39 39.25" (1000 mm)					
40 40" (1016 mm)					

Other lengths available upon request

**Viton is a registered trademark of E.I. DuPont de Nemours & Co., Inc

Parker dominick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.

PROSEP FILTER SYSTEMS LTD
Unit G19
River Bank Way
Lowfields Business Park
Elland
West Yorkshire
HX5 9DN

Tel: 01422 377367

Fax: 01422 377369

Email: enquiries@prosep.co.uk

www.prosep.co.uk

Map and Directions to Prosep Filters Limited



Leave M62 at Junction 24.

At roundabout adjacent to Cedar Court Hotel take 2nd exit onto dual carriageway (A629), signposted Halifax.

Take 1st exit slip road.

At roundabout at end of sliproad, take 3rd exit off.

This is the entrance to Lowfields Business Park.

Proceed straight over 1st roundabout.

At next roundabout take 2nd exit onto River Bank Way - Prosep Filters can be found on the left after the S-bend.

[Link to Google Maps](#)