



TEXFLOW Filter Cartridges

- liquid filters
- wound depth filters

TEXFLOW precision wound depth filter cartridges are manufactured to give a considerable dirt holding capacity coupled with high flow rates and low pressure loss. TEXFLOW elements consist of a perforated support core of plastic or metal onto which yarn is wound at a pre-set rate, providing each rating of element with its own distinctive winding pattern and performance.


During the winding process the yarn is usually brushed (or napped). This has the effect of increasing the working area of the elements thus providing a higher dirt holding capacity whilst maintaining the rigid structure. Although the cartridges are mainly for liquid filtration, they can also be employed for gases. Other fibres such as polyester, cotton, nylon can operate at higher temperatures and have differing chemical compatibility. For very high temperatures and for very strong oxidising agents, baked glass fibre elements are used. Glass fibre elements are fitted with voiles and stainless steel cores as standard, other cartridges can also be fitted with voiles where necessary.

Features and Benefits

- Protection of absolute filters
- High dirt holding capacity
- Wide chemical compatibility
- Filter ratings from 0.5 to 100 microns



Performance Characteristics

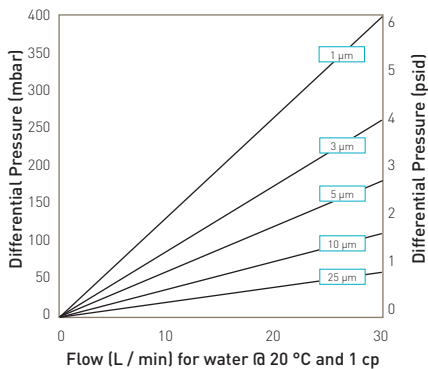

10" Size (250 mm) Cartridge

Specifications

Materials of Construction

- Filtration Media: Polyester
(Various yarns) Polypropylene
Bleached Cotton
Glass Fibre
Washed Polypropylene
Nylon
- Inner Support Core: Polyester
Polypropylene
304 Stainless Steel
316 Stainless Steel
Tinned Steel
Glass / Poly
Glass / Nylon

Recommended Operating Conditions

- Maximum Temperature
with stainless core:
- Cotton : 149°C (300°F)
 - Polypropylene : 93°C (199°F)
 - Polyester : 121°C (250°F)
 - Glass Fibre : 399°C (750°F)
- with polypropylene core:
- Cotton : 60°C (140°F)
 - Polypropylene : 60°C (140°F)
 - Polyester : 60°C (140°F)

Cleaning and Sterilisation

TEXFLOW filters can be back-washed for extended life, but generally are treated as "disposable filters".

Maximum Operating Pressure

4 barg (58 psi)

Recommended Changeout Pressure

2 barg (29 psi)

Applications

- Process water
- Plating baths
- Phosphate baths
- Melt polymer filtration
- Spin pack protection
- Polyester

Ordering Information

Cartridges

Code Length (Nominal)	Code Micron	Code Yarn	Code Core Type	Code Diameter	Code End Fitting
04 4" (100 mm)	A5 0.5 µm	01 Polyester	1 Polyester	1 62 mm	0 DOE
05 5" (125 mm)	01 1 µm	02 Polypropylene	2 Polypropylene	2 50 mm	2 Flat / 226
06 6" (160 mm)	03 3 µm	04 Bleached Cotton	3 304 Stainless Steel	6 100 mm	3 Flat / 222
09 9.75" (248 mm)	05 5 µm	06 Glass Fibre	5 316 Stainless Steel	7 66 mm	6 Flat / 118 / 020
10 9.875" (251 mm)	10 10 µm	07 Nylon	7 Tinned Steel		7 Fin / 226
11 10" (254 mm)	20 20 µm	09 Washed Polypropylene	8 Glass / Poly		8 Fin / 222
19 19.75" (500 mm)	25 25 µm		9 Glass / Nylon		9 213
20 20" (508 mm)	50 50 µm				
29 29.50" (750 mm)	75 75 µm				
30 30" (762 mm)	99 100 µm				
39 39.25" (1000 mm)					
40 40" (1016 mm)					

As with any addition to a process system, it is important to flush through new filter cartridges before running 'on line'. Standard polypropylene cartridges contain traces of an FDA Glycol Ester Spin Finish which can cause 'foaming' when new. Where this may be a problem e.g. electro plating applications, washed polypropylene elements are recommended.

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.

PROSEP FILTER SYSTEMS LTD
Unit G19
River Bank Way
Lowfields Business Park
Elland
West Yorkshire
HX5 9DN

Tel: 01422 377367

Fax: 01422 377369

Email: enquiries@prosep.co.uk

www.prosep.co.uk

Map and Directions to Prosep Filters Limited



Leave M62 at Junction 24.

At roundabout adjacent to Cedar Court Hotel take 2nd exit onto dual carriageway (A629), signposted Halifax.

Take 1st exit slip road.

At roundabout at end of sliproad, take 3rd exit off.

This is the entrance to Lowfields Business Park.

Proceed straight over 1st roundabout.

At next roundabout take 2nd exit onto River Bank Way - Prosep Filters can be found on the left after the S-bend.

[Link to Google Maps](#)