



MAXGUARD Select Large Diameter Filters

- liquid filters
- polypropylene and cellulose

Parker's MAXGUARD Select high capacity cartridge provides a cost-effective alternative to bag media or standard 2-1/2-inch cartridges for high flow applications.


Each MAXGUARD cartridge can handle flows up to 379 lpm, significantly reducing the number of cartridges required for large-flow applications.

The MAXGUARD Select contains up to 40% more dirt-holding capacity than the standard MAXGUARD. The MAXGUARD Select cartridge is available with polypropylene media.


All cartridges feature an industry standard 226 positive o-ring seal and easy-to-grasp integrated handle.

Features and Benefits

- High flow capacity means fewer cartridges and reduced labor costs associated with change-out
- Cartridge is 100% thermally welded
- Positive 226 o-ring seal assures filtration integrity
- Absolute retention ratings from 0.5 to 70 micron for critical filtration

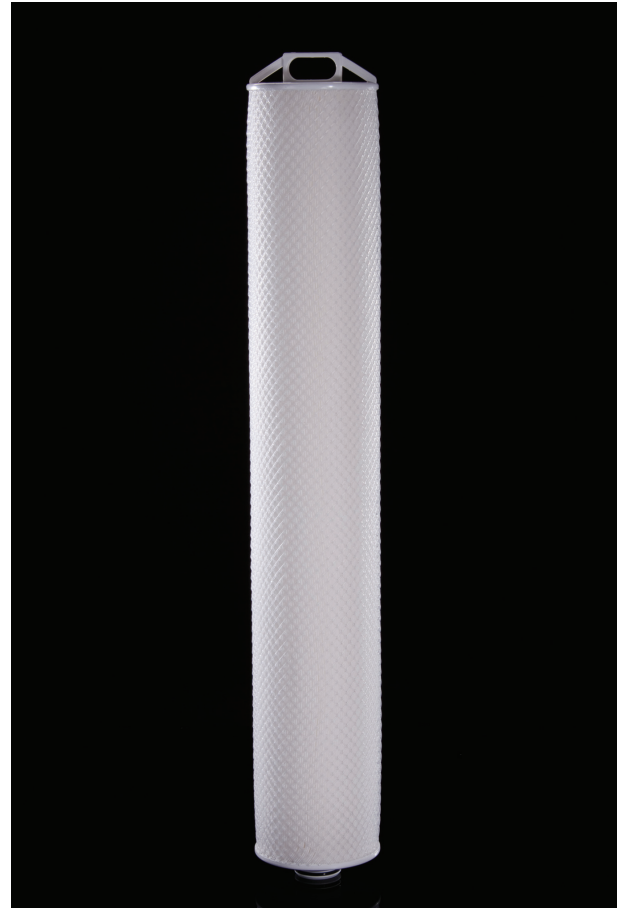


Performance Characteristics

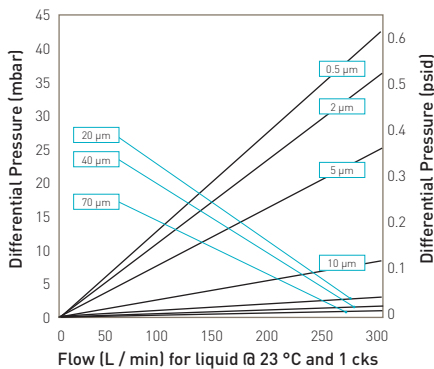

40" Size (1016 mm) Cartridge

Specifications

Materials of Construction

- Filtration Media: Polypropylene
- Support / Drainage: Polypropylene
- Structural Components: Polypropylene
- Seal Material: Various
- Select Pleating: 

Retention Characteristics

	Micron Rating at Various Efficiencies				
	Absolute 5000	99.9% 1000	99% 100	98% 50	95% 20
MGSP005	0.5	0.4	0.2	>0.2	<0.1
MGSP020	2	1.4	0.4	0.2	<0.1
MGSP050	5	3.8	1.2	0.3	<0.1
MGSP100	10	7	3	0.9	<0.2
MGSP200	20	18	5	2	<0.2
MGSP400	40	23	18	8	<0.7
MGSP1000	100	91	83	64	35

Filtration Rating

99.98% at specified micron rating

Recommended Operating Conditions

Max Temperature: 80°C (176°F)
at 2.1 bar (30 psid)

Max Differential Pressure Forward: 4.8 bar (70 psid)
at 25°C (77°F)
2.1 bar (30 psid)
at 80°C (176°F)

Dimensions

Outside diameter: 154 mm (6.06")
Inside diameter: 49 mm (1.92")

Flow Characteristics

MAXGUARD Select filters are capable of filtering 378 L/min.

Applications

- Amines
- Commercial water
- Industrial wash waters

Ordering Information

MGSP				SM
Cartridge Series	Code Micron	Code Length	Code Seal Material	Endcap Configuration
MAXGUARD Select	005 0.5 µm 020 2.0 µm 050 5.0 µm 100 10.0 µm 200 20.0 µm 400 40.0 µm 700 70.0 µm	30 30" (750 mm) 40 40" (1016 mm)	E EPR N Buna-N V Viton* S Silicone T PFA / Viton	226 O-Ring / Flat Cap w / handle

*Viton is a registered trademark of E.I. DuPont de Nemours & Co., Inc

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.

PROSEP FILTER SYSTEMS LTD
Unit G19
River Bank Way
Lowfields Business Park
Elland
West Yorkshire
HX5 9DN

Tel: 01422 377367

Fax: 01422 377369

Email: enquiries@prosep.co.uk

www.prosep.co.uk

Map and Directions to Prosep Filters Limited



Leave M62 at Junction 24.

At roundabout adjacent to Cedar Court Hotel take 2nd exit onto dual carriageway (A629), signposted Halifax.

Take 1st exit slip road.

At roundabout at end of sliproad, take 3rd exit off.

This is the entrance to Lowfields Business Park.

Proceed straight over 1st roundabout.

At next roundabout take 2nd exit onto River Bank Way - Prosep Filters can be found on the left after the S-bend.

[Link to Google Maps](#)