

# Clariflow® Water Service Grade

Hydrophilic polyethersulfone (PES) membrane for cost-effective purification

Clariflow® Water Service Grade cartridges are cost-effective alternatives to Clariflow E and G Grade cartridges for the filtration of a variety of aqueous liquids.

The Water Service cartridge is built around a unique polyethersulfone (PES) membrane that is inherently hydrophilic, and contains no added surfactants or wetting agents. It delivers clean filtrates, flow rates, extended service life and excellent resistance to hydrolysis.

Water Service cartridges are fabricated under cleanroom conditions.



## Contact Information

Parker-Hannifin Corporation  
**domnick hunter**  
**Process Filtration - North America**  
2340 Eastman Avenue  
Oxnard, California, USA 93030

toll free: +1 877 784 2234  
phone: +1 805 604 3400  
fax: +1 805 604 3401  
dhpsales.na@parker.com

[www.parker.com/processfiltration](http://www.parker.com/processfiltration)



## Benefits

- Absolute rated membrane
- Reliable and cost-effective
- Broad chemical compatibility allows use in aqueous applications
- Resistance to hydrolysis allows extended use in UPW systems
- High flow rate/low differential pressure reduces system wear and tear

## Applications

- Deionized water filtration
- Liquid clarification
- Recirculating liquids
- Wine and beer clarification
- Juices
- Bottled water
- Process water

ENGINEERING YOUR SUCCESS.

# Clariflow® Water Service Grade

## SPECIFICATIONS

### Materials of Construction

Membrane	Polyethersulfone
Support layers	Polypropylene
Structure	Polypropylene

All components meet USP-XXIV Class VI-121°C criteria and are thermally bonded to assure integrity and purity.

### Maximum Differential Pressure

#### Forward

80 psid (5.5 bar) @ 75°F (24°C)  
40 psid (2.8 bar) @ 180°F (82°C)

#### Reverse

50 psid (3.4 bar) @ 75°F (24°C)

### Effective Filtration Area

5.4 ft<sup>2</sup> (0.50 m<sup>2</sup>) per 10 inch (250 mm) cartridge

### Bulk Packaging

Bulk packaged in case quantities to reduce material disposal


- 10" - 28 per carton
- 20" - 12 per carton
- 30" - 12 per carton
- 40" - 9 per carton

## PERFORMANCE ATTRIBUTES

### Water Flow Rates

0.1 µm	1.3 gpm/psid (7.14 lpm/100 mbar)
0.2 µm	2.6 gpm/psid (14.27 lpm/100 mbar)
0.45 µm	3.8 gpm/psid (20.86 lpm/100 mbar)

\* Per 10 inch (250 mm) cartridge equivalent and for fluids with viscosity of 1cP

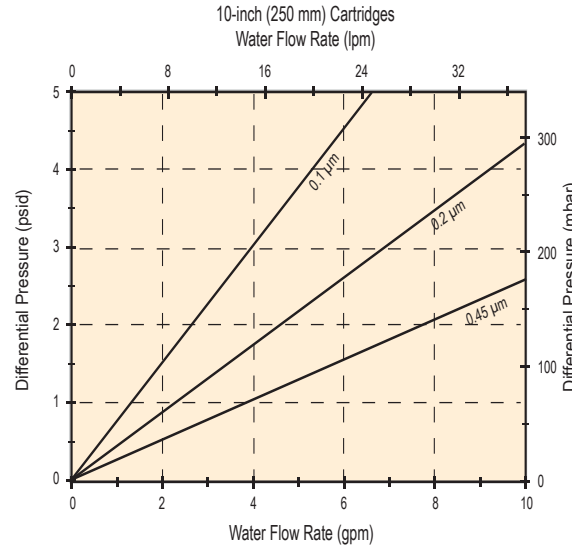

## Ordering Information

Each cartridge is identified with a product number, pore size, and lot number for traceability.



Insert Style		End Fittings		Nominal Length		Filter Rating		Gasket/O-rings		Thickness (Gaskets Only)	
CODE	DESCRIPTION	CODE	DESCRIPTION	CODE	LENGTH	CODE	MICRON	CODE	MATERIAL	CODE	THICKNESS
1	No Insert (standard)	0	DOE (CUNO®)	10	10" (250 mm)	001	0.1 µm	0	Buna N	1	0.200" (5 mm)
5	Encapsulated 316 SS Insert	1	DOE	20	20" (500 mm)	002	0.2 µm	1	EPDM	2	0.125" (3mm)
6	Encapsulated Polysulfone Insert	2	226/Flat	30	30" (750 mm)	004	0.45 µm	2	Silicone	4	(1) 0.200" (5 mm) & (1) 0.125" (3 mm)
A	1/2" Shortened Filter (222 only)	3	222/Flat	40	40" (1,000 mm)			4	Viton®	N	None
		6	020/Internal/Flat					5*	Encapsulated Viton®		
		7	226/Fin					6*	Encapsulated Silicone		
		8	222/Fin					N	None		
		G	120/Internal/Recessed								
		H	213 internal/recessed endcap								
		R	213 internal/recessed endcap (Ametek®)								
			222/Recessed End cap								

All cartridges are 2.75" (690 mm) in diameter.

\*O-rings only

Clariflow-G is a registered trademark of Parker-Hannifin Corporation.  
Viton is a registered trademark of E.I. duPont de Nemours & Co. Inc.

© 2008 Parker-Hannifin Corporation  
domnick hunter Process Filtration - North America  
All Rights Reserved  
DS\_GN\_Clariflow-WG Cart Rev.A



ENGINEERING YOUR SUCCESS.



01422 377367



enquiries@prosep.co.uk

**PROSEP**  
FILTER SYSTEMS LTD

WE ARE YOUR **'ONE STOP SHOP'** FOR ALL  
OF YOUR FILTRATION REQUIREMENTS

**LIQUID FILTRATION**

- CARTRIDGES
- FILTER BAGS
- VESSELS
- STRAINERS

**AIR FILTRATION**

- VENT FILTERS
- STERILE AIR
- VACCUM
- AIR-CONDITIONING
- FILTER MEDIA

**DOMESTIC**

- ULTRAVIOLET
- TREATMENT OF BOREHOLES,  
SPRINGS & WELLS
- WATER TESTING

**FUEL FILTRATION**

- DIESEL, AVIATION



**Prosep Filter Systems Ltd**  
Unit G19, River Bank Way,  
Lowfields Business Park,  
Elland, West Yorkshire  
HX5 9DN

**Phone: 01422 377367**  
email: [sales@prosep.co.uk](mailto:sales@prosep.co.uk)  
[www.prosep.co.uk](http://www.prosep.co.uk)



*for all your filter requirements*