


PRODUCT INFORMATION

Temporary Strainers



SIZES: 2" TO 24"

RATING: ANSI 150 TO 2500 LBS

FABRICATED BODY - FLANGED COVER

Prosep Temporary strainers offer the first choice where the highest performance and quantity requirements are important. These strainers are in operation in more than 30 countries in exacting applications including many North Sea Offshore platforms.

AVAILABLE MATERIALS

*Carbon steel, stainless steels, and special alloys


DESIGN

Prosep Temporary strainers are designed to provide inexpensive protection for costly pumps, meters, valves and other equipment during commissioning and start up..They are also used post UV on sensitive applications such as swimming pools to prevent broken glass entering the swimmingpool should any of the glass components in the UV shatter.

*Special units to customers designs are available on request *For sizes and pressure ratings not shown contact our sales office

MANUFACTURING

*The quality standard of the strainers is guaranteed by a Quality Assurance and Control system to ISO9002

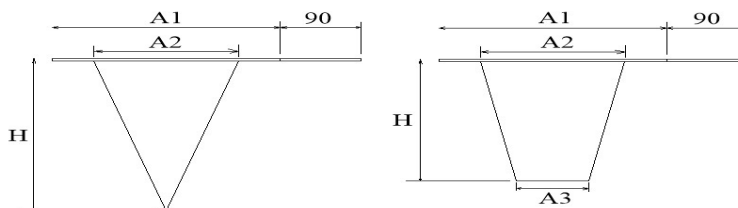

| N B | | 1" | 1 1/2" | 2" | 3" | 4" | 6" | 8" | 10" | 12" | 14" | 16" | 18" | 20" | 24" |
|--------|-----------------|-----|--------|------|-----|-----|-----|-----|-----|-----|--------------------------------------|-----|-----|-----|-----|
| A1 | 150 | 63 | 79 | 98 | 130 | 168 | 215 | 273 | 333 | 403 | 444 | 508 | 542 | 600 | 711 |
| | 300 | 69 | 88 | 104 | 142 | 174 | 244 | 301 | 355 | 415 | 479 | 533 | 590 | 647 | 768 |
| | 600 | 69 | 88 | 104 | 142 | 187 | 260 | 314 | 393 | 450 | 485 | 558 | 606 | 676 | 784 |
| | RJT | 42 | 60 | 71 | 112 | 138 | 200 | 258 | 312 | 369 | 408 | 458 | 522 | 571 | 676 |
| A2 | | 22 | 31 | 44 | 67 | 88 | 139 | 181 | 228 | 276 | 320 | 368 | 415 | 466 | 568 |
| A3 | | 12 | 19 | 31 | 50 | 63 | 101 | 142 | 184 | 225 | 257 | 290 | 342 | 381 | 457 |
| B | Conical 150% | 38 | 101 | 114 | 165 | 215 | 330 | 431 | 533 | 635 | AVAILABLE ON SPECIAL REQUEST ONLY | | | | |
| | Conical 200% | 50 | 139 | 152 | 228 | 292 | 431 | 584 | 685 | 825 | | | | | |
| B | Basket 150% | 38 | 63 | 83 | 88 | 114 | 165 | 215 | 254 | 304 | 330 | 355 | 381 | 431 | 508 |
| | Basket 200% | 50 | 88 | 88 | 114 | 152 | 228 | 304 | 355 | 419 | 431 | 482 | 533 | 609 | 711 |
| K G | | 0.5 | 0.75 | 0.75 | 1 | 1 | 2 | 4 | 6 | 7 | 8 | 10 | 14 | 20 | 26 |

Prosep Filter Systems Ltd
Unit G19, River Bank Way,
Lowfields Business Park, Elland,
West Yorkshire HX5 9DN

Phone: 01422 377367
email: sales@prosep.co.uk
www.prosep.co.uk

for all your filter requirements