

PROSEP FILTER SYSTEMS LTD

64 Series 5 Stack Housing

No.	Description	Material	Stock Code
1	HIGH DOME	316L ST.STL.	63S051000
2	HIGH DOME	316L ST.STL.	63S052000
1	3 HIGH DOME	316L ST.STL.	63S053000
2	2 HIGH GUIDE + CUP	316L ST.STL.	60S002000
2	3 HIGH GUIDE + CUP	316L ST.STL.	60S003000
2	4 HIGH GUIDE + CUP	316L ST.STL.	60S004000
3	GUIDE CUP	316L ST.STL.	60S000000
4	CENTRE ROD TOP SECTION	316L ST.STL.	63S001000
4	CENTRE ROD TOP SECTION	316L ST.STL.	63S002000
4	CENTRE ROD TOP SECTION	316L ST.STL.	63S003000
5	SPRING + SEAL ASSEMBLY	316L ST.STL.	60S000002
6	COMPRESSION PLATE	316L ST.STL.	60S050001
7	COMP NUT + WASHER	316L/PTFE	60S000003
8	COMP NUT WASHER	PTFE	60S00000T
9	TOP GASKET	E.P.	60S05000E
9	TOP GASKET	SILICONE	60S05000S
9	TOP GASKET	VITON	60S05000V
10	CLAMP	304 ST.STL.	60S050002
11	CLAMP TEE BAR	316L ST.STL.	60S000022
12	DRAIN CAP	316L ST.STL.	60S000005
13	VENT CAP	316L ST.STL.	60S000004
14	ADJUSTABLE LEGS	304 ST.STL.	60S050003

Connection Options	Dim 'B'	Dim 'F'
DNSO BS4504 PN16 SO	200	156
2" ANSI B16.5 150lb SO	200	156
DNSO DIN 2633	240	196
2" TRI-CLAMP	201	154
NWSO DIN 11851 'M'	214	167
2" RJT 'M'	201	154
2" IDF 'M'	201	154




DESIGN PRESSURE Bar g		DESIGN TEMPERATURE °C	
LIQUID	GAS	MIN.	MAX.
10	4.5	0	110

Model	No. of Cartridges	Max Operating Conditions Bar.g and °C	Materials of Construction	Connection Size and Type	Volume (litres)	Dry Weight (kg)	Dimension (mm)				
							A	B	C	D	E
640520AC20AIEE	5 x 20"	SEE TABLE	316L ST.STL.	2" BSP 'M'	23.3	20.0	627	200	-	150	350
640530AC20AIEE	5 x 30"	SEE TABLE	316L ST.STL.	2" BSP 'M'	31.3	22.7	682	200	-	150	600
640540AC20AIEE	5 x 40"	SEE TABLE	316L ST.STL.	2" BSP 'M'	39.3	25.4	1137	200	-	150	850

64 SERIES 5 STACK HOUSING
WITH DISHED END AND SPLIT SHELL
FOR D.O.E. CODE 'O' ELEMENTS

Drg. No. 6405-1

Rev. 1

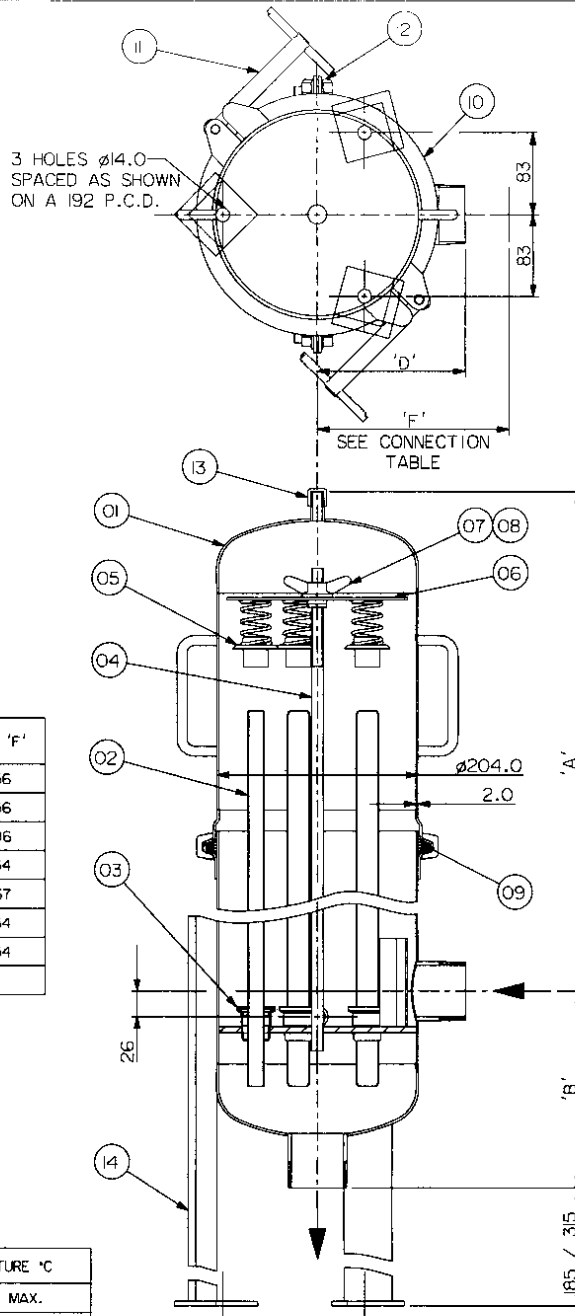

UNIT G19, RIVER BANK WAY, LOWFIELDS BUSINESS PARK,
ELLAND, WEST YORKSHIRE HX5 9DN
TEL: 01422 377367 FAX: 01422 377369
Email: sales@prosep.co.uk Web: www.prosep.co.uk