

# PROSEP FILTER SYSTEMS LTD




## DUPLEX BASKET STRAINERS



### DUPLEX BASKET STRAINERS

For use where the line cannot be shut down whilst the basket is cleaned or changed. Two strainer units combined with a plastic diverter valve allows the flow to be directed through one of the two baskets by the movement of a single lever. The full basket can then be cleaned or changed without interrupting the flow.

Sizes: 20 mm (1/2") - 110 mm (4").

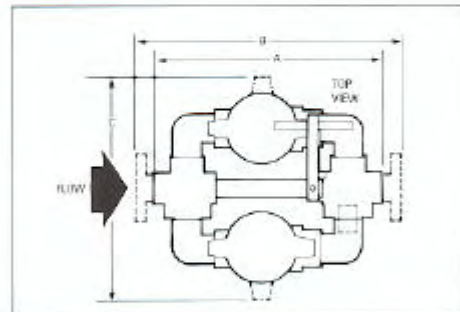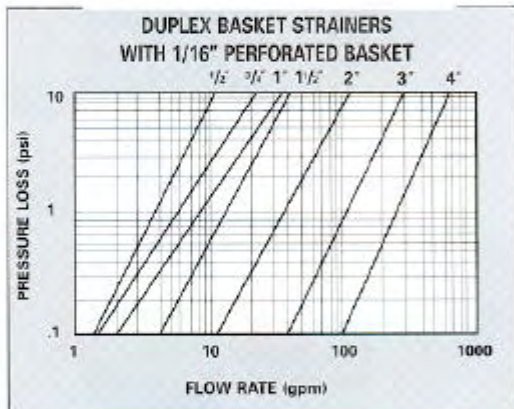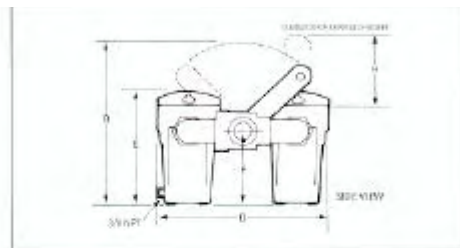

Size	A	B	C	D	E	F	G	H	WGT KG EMPTY	
									SOC/THD	FLANGED
20	387	435	384	305	213	133	324	178	4.9	5.3
25	387	447	384	305	213	133	324	178	4.9	5.3
32	387	447	384	305	213	133	324	178	4.9	5.3
50	572	651	572	406	305	203	486	257	15.0	15.6
63	572	657	572	406	305	203	486	257	15.0	16.0
80	813	914	813	603	419	267	635	308	42.0	44.5
110	902	1035	895	711	534	378	724	416	45.0	48.5

DUPLEX BASKET STRAINERS - All dimensions in millimetres, for reference only. For installation purposes, please request certified drawings.

UNIT G19, RIVER BANK WAY, LOWFIELDS BUSINESS PARK,  
ELLAND, WEST YORKSHIRE HX5 9DN  
TEL: 01422 377367 FAX: 01422 377369  
Email: sales@prosep.co.uk Web: www.prosep.co.uk